


PLANET INFORMATION
2/15/74
101-101-101

DRAWING NUMBER

[Illegible handwritten notes]


BEHIND THE SCENES

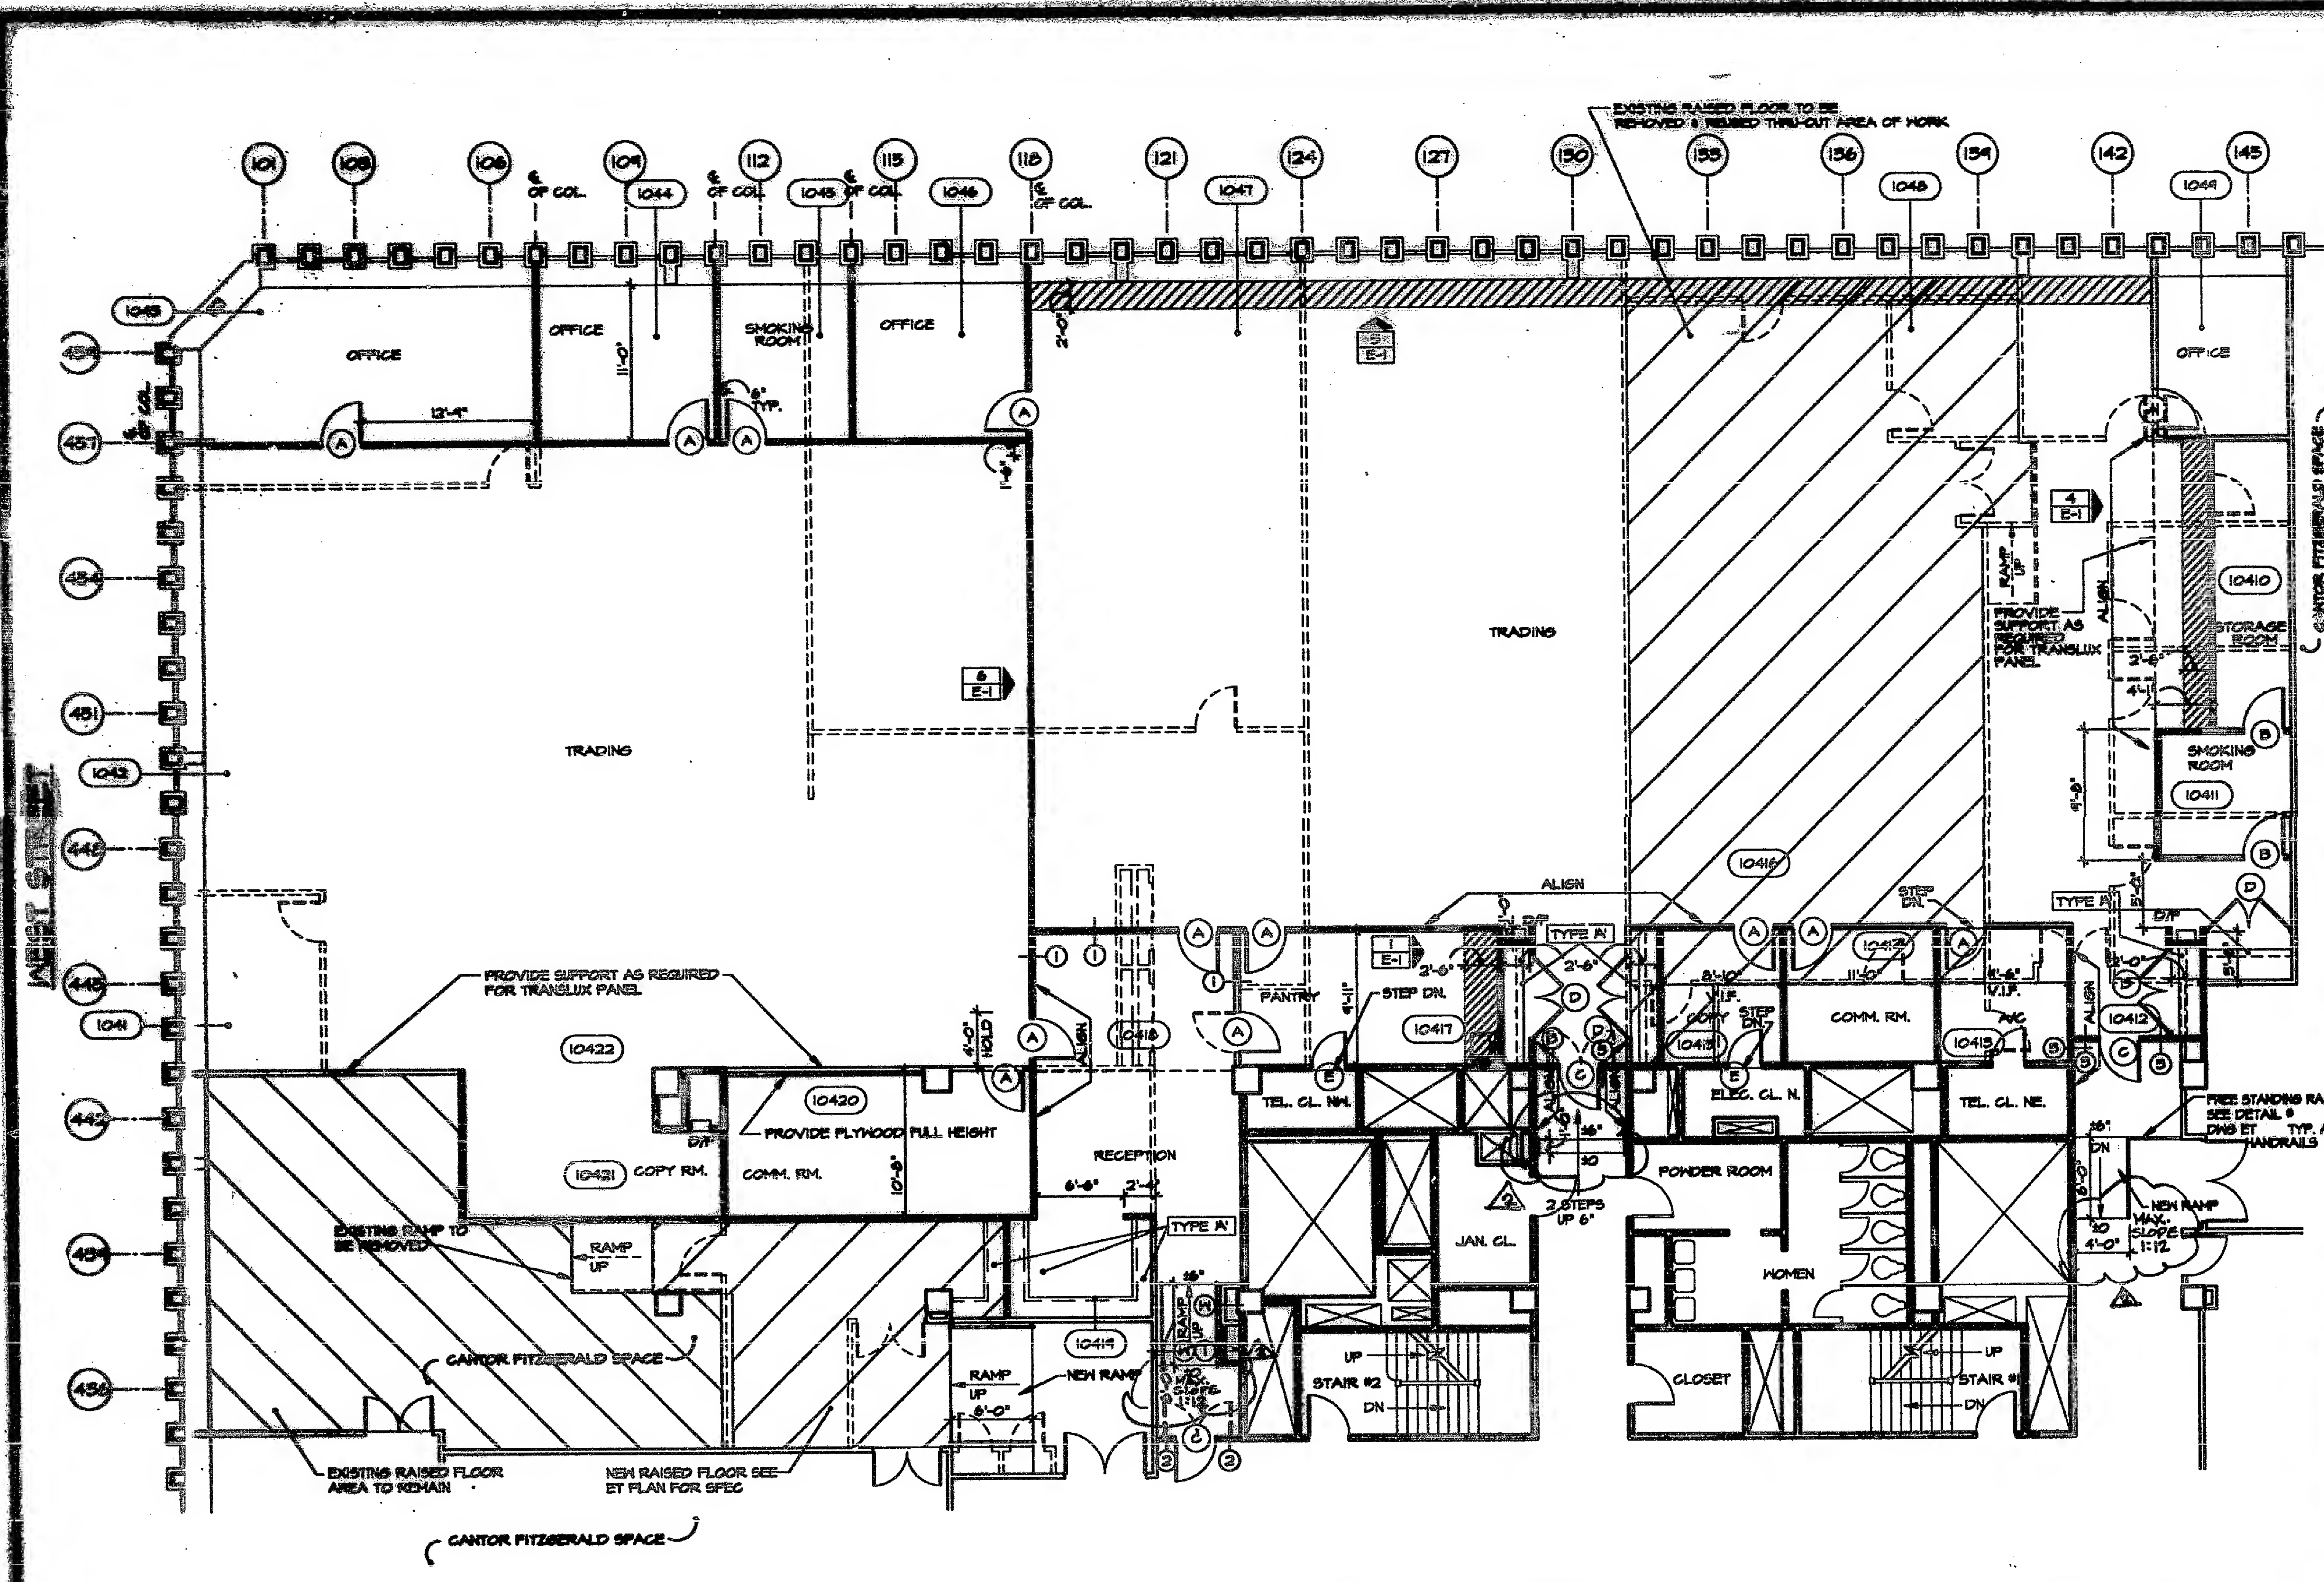

DOOR SCHEDULE:

TYPE	SIZE	MATL	TYPE	HINGE	CLOSER	STOP	LATCH SET	REMARKS
A	5'-0" X 7'-0"	HM	1	H-1	-	S-1	LS-1	OFFICE DOOR
B	5'-0" X 7'-0"	HM	1	H-1	-	S-1	LS-2	OFFICE DOOR
C	3'-0" X 7'-0"	HM	2	H-1	C-1	S-1	LS-2	ENTRANCE DOOR 5/4" x 6" FIRE RATED
D	2 @ 5'-0" X 7'-0"	MD	3	H-2	-	S-1	LS-3	DOOR TO HALLWAY CONCRETE CORE CLOSET DOOR
E	5'-0" X 7'-0"	HM	1	H-1	-	S-1	LS-2	SEE NOTE #6



DOOR TYPES

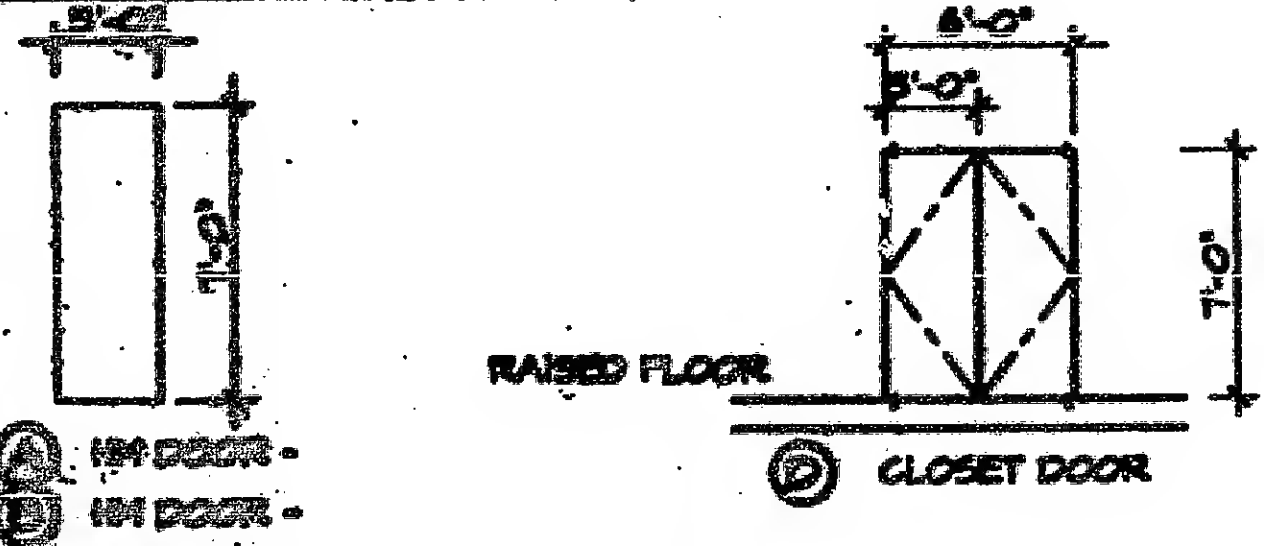


NEW 530

1. ALL DOORS TO BE 1 1/2" THICK.
2. COMMON LINE OF LUMBER TO BE 2" X 4" AFF.
3. CONTRACTOR TO VERIFY COMPATIBILITY OF ALL HARDWARE.
4. PROVIDE SILENCERS ON ALL DOORS.
5. ALL HARDWARE FINISHED TO BE IN 20.
6. NEW SLIGHT DOORS TO MATCH EXISTING STANDARD LCN.

FRAME TYPES

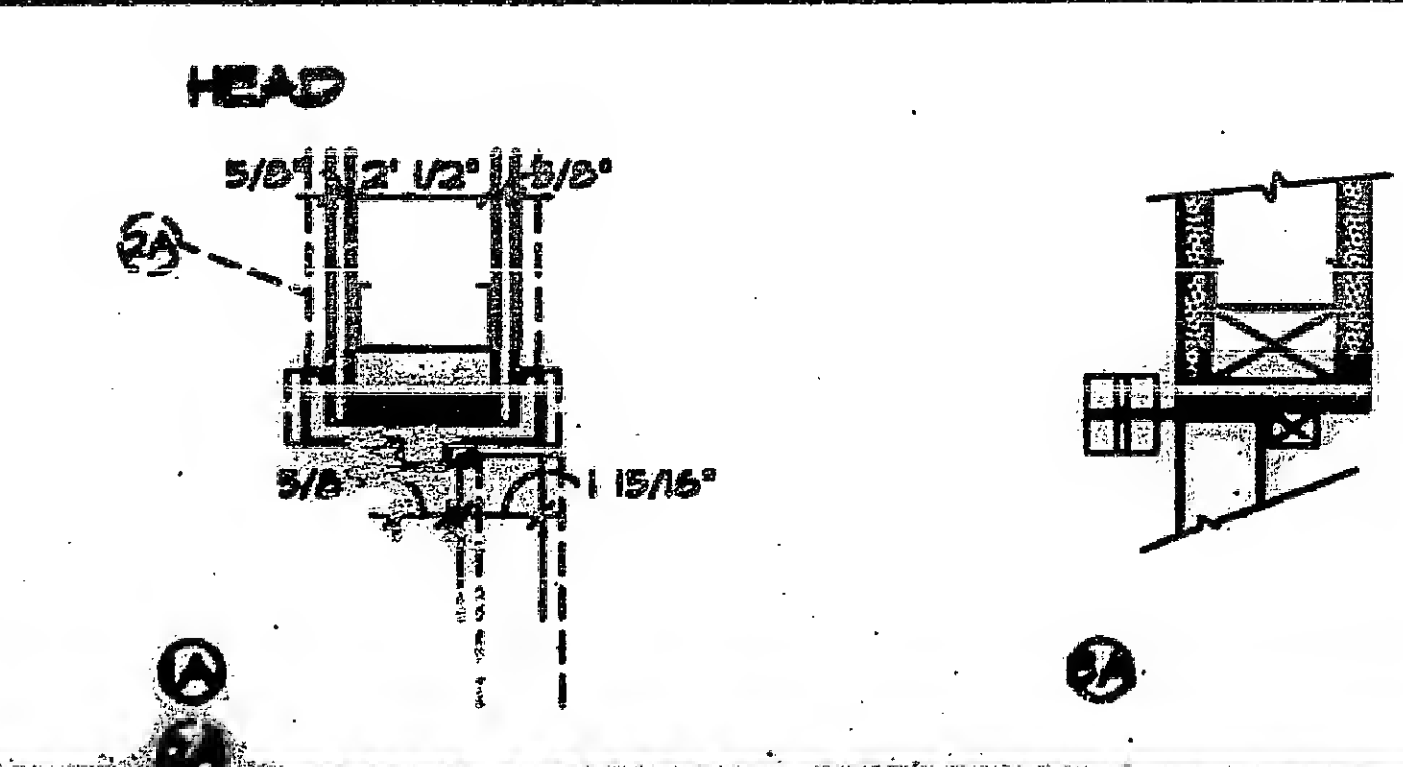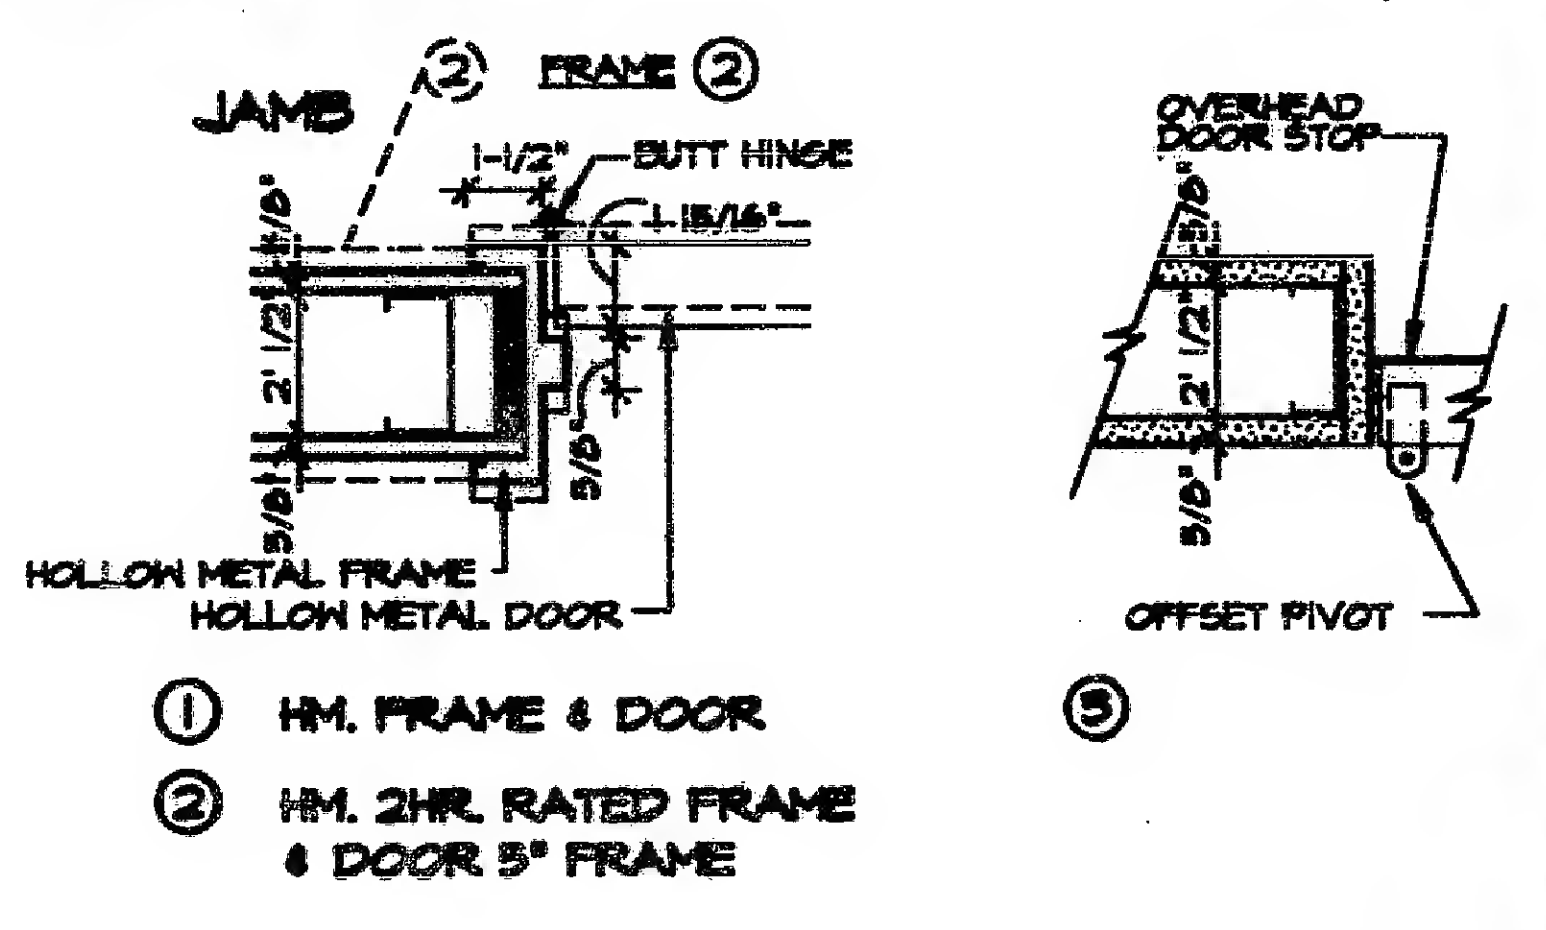


SECTION
COAT CLOSET (TYPE "A")

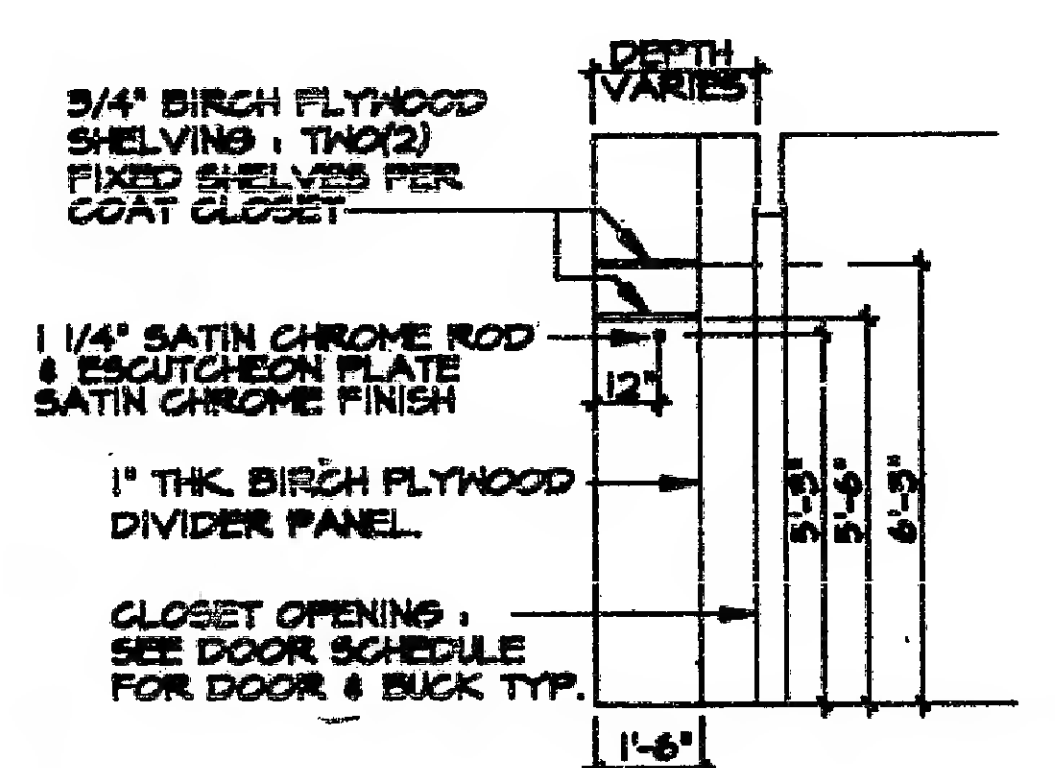

CLOSET NOTES

1. 3/4" VERTICAL DIVIDER TO BE PROVIDED WHEREVER SHELF SPAN EXCEEDS 3'0"
2. ALL BIRCH FLYWOOD SHALL BE CLEAR LACQUER FINISH

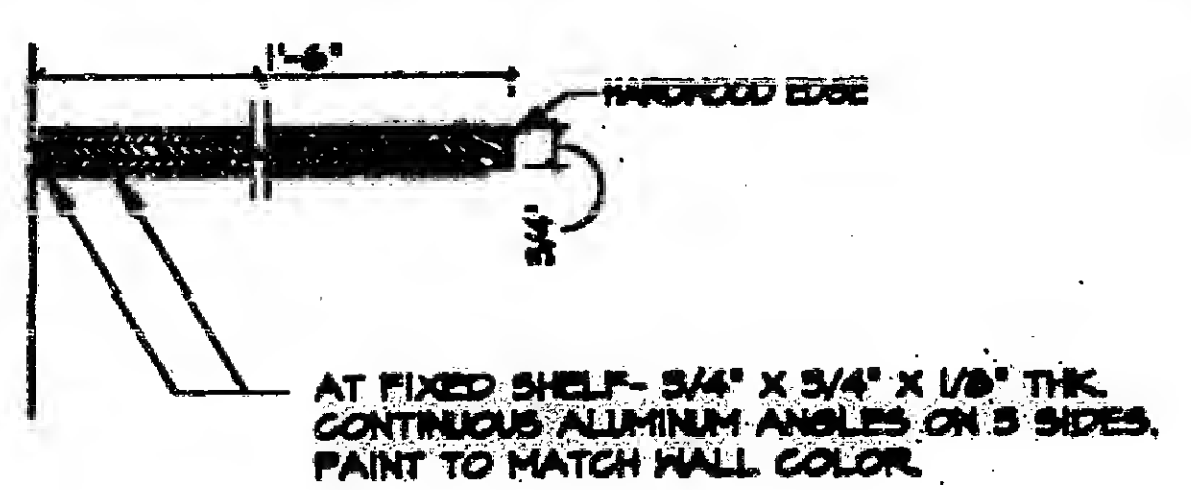

TYPICAL CLOSET SHELF DETAIL